


imageRUNNER C1225/C1225iF

Productive and cost effective A4 colour multifunctionals

These feature rich A4 colour multifunctional devices, provide fast and efficient document handling 'out of the box' so you can focus on your business priorities

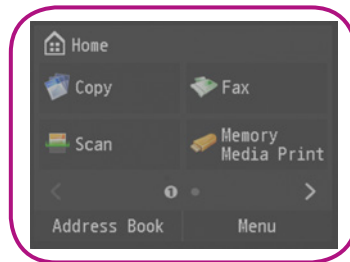

- Powerful A4 colour multifunctional devices with print, copy, colour scan, send and fax¹ functionality, ideal for demanding small businesses
- Simple and user friendly operation with the 8.9 cm colour touch and swipe LCD display
- Canon's V² colour (Vivid and Vibrant) imaging technology ensures documents impress and stand out from the rest
- Seamlessly fit into your office environment with network connectivity and supporting IT standards such as PCL¹ and Genuine Adobe PS¹
- Increase productivity with up to 1,100 sheet capacity and a Duplex Automatic Document Feeder (DADF)
- Scan and Send documents directly to a variety of destinations including email and shared folder
- Flexible mobile printing and scanning capabilities such as Apple AirPrint™, Mopria printing as well as mobile printing and scanning apps, support mobile worker efficiency
- Out of the box easy install; users can access the set-up guide via the user interface
- Consumables can be changed easily reducing down-time
- Standard toner included in the box giving up to 12 months colour printing²
- Giving you peace of mind with Canon's standard warranty¹
- Extended language support for function menus, print drivers and labels, gives users the possibility to navigate in their own language³
- Energy consumption as little as 1 watt in sleep mode
- Compact and efficient space saving design



PRINT



COPY



FAX



SCAN


AirPrint™ and the AirPrint logo are trademarks of Apple Inc.

¹imageRUNNER C1225iF only

²Actual results will vary and may be higher or lower than 12 months depending on individual usage. 12 months colour printing is based on a monthly print volume of 1,000 pages, 30% colour pages and 5% A4 coverage (ISO/IEC 24712). Standard Black toner yield is 12,000 pages. Yellow, Magenta and Cyan toner yield is 7,300 pages

³The imageRUNNER C1225/iF are localised in all standard European languages as well as Russian, Turkish, Arabic, Polish, Hungarian, Czech and Slovak. However, Arabic UI is not supported

Canon

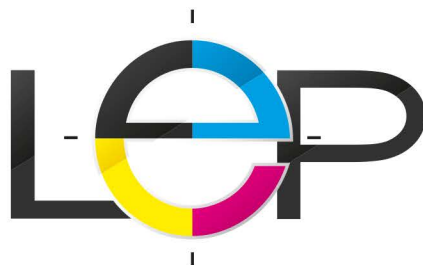

1^{er} site Français spécialiste **en photocopieur** et **solution bureautique**
Location - Achat - Leasing - Entretien - Maintenance

📍 COUVERTURE NATIONALE 👤 RÉSERVÉ AUX PROS ☆ SERVICE 100% GRATUIT ⌚ SIMPLE ET RAPIDE



Ce modèle de photocopieur vous intéresse ?
Vous souhaitez obtenir plus d'information ?

Entrez en relation avec un distributeur
agréé dans votre département



RÉALISEZ UNE DEMANDE DE DEVIS
Gratuit et sans engagement

Technical Specifications

imageRUNNER C1225/C1225iF

| | | | |
|---|--|---|---|
| Machine type | Colour A4 Laser Multifunctional (Reader / Printer standard) | Scan resolution | BW Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi CL Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi |
| Available core functions | Print, Copy, Scan, Send and Fax standard for C1225iF Fax not available for C1225 | Double sided scanning | 2-sided to 2-sided (Automatic) |
| Printer Specifications | | Scan speed | BW single-sided: 25 ipm (A4, 300 dpi X 300 dpi), BW double-sided: 9 ipm (A4, 300 dpi X 300 dpi) CL single-sided: 25 ipm (A4, 300 dpi X 300 dpi), CL double-sided: 9 ipm (A4, 300 dpi X 300 dpi) |
| Print speed (BW/Colour) | 25/25ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 25/25ppm (A4 Double-sided), 26/26ppm (A5 Double-sided) | Scan methods | Push Scan: Colour Send functionality is standard. Pull Scan: TWAIN/WIA Pull scanning available on all models. Scan to USB Memory Key: Available on all models Scan to mobiles, internet-connected devices: A range of solutions is available to provide scanning to mobile devices, internet-connected devices depending on your requirements. Please contact your sales representative for further information. |
| Printing method | Colour Laser Beam Printing | Pull scan specifications | <u>TWAIN/WIA Pull scanning</u> Windows XP Windows Vista/Windows 7/Windows 8/Windows 8.1 |
| Print resolution | 2400 dpi equivalent x 600 dpi, 600 dpi x 600 dpi | | <u>Mac Scan (TWAIN only)</u> Mac OS X 10.5.8 or later *The drivers are available via http://software.canon-europe.com . |
| Double sided printing | Automatic (Standard) | | |
| Direct print | Direct printing available from USB memory key Supported file types: JPEG, TIFF, PDF | | |
| Printing from mobiles or internet-connected devices and cloud-based services | A range of software is available to provide printing from mobile or internet-connected devices. Please contact your sales representative for further information. | Send Specifications | |
| Paper input (Standard) | 1 x 550-sheet (80 gsm) cassette, 100-sheet (80 gsm) multi-purpose tray | Optional/Standard | Standard on all models |
| Paper input (Option) | 1 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AJ1) | Send resolution | 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi |
| Maximum paper input capacity | 1200 sheets (80 gsm) | Destinations | E-Mail, Fax (not available for C1225), PC (SMB, FTP) |
| Paper output capacity | 250 sheets (80 gsm) | Address Book/Speed dials | LDAP (Max. 50 searchable), Local (Max. 300 including 281 Speed dials) |
| Finishing capabilities | Standard: Collate, Group | File formats | SMB : JPEG, TIFF, PDF, Compact PDF, Searchable PDF E-mail : PDF, Compact PDF, Searchable PDF |
| Supported media types | Cassette/s: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes* *Envelope support via standard cassette 1 only. Multi-purpose tray: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL) Paper cassette 1: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL) Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm) Paper cassettes 2: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm) Multi-purpose tray: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5,DL) Cassette/s : 60 to 163 gsm Multi-purpose tray: 60 to 220 gsm Duplex: 60 to 163 gsm | Optional Universal Send Feature Sets | Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files. |
| Supported media sizes | | Fax Specifications | |
| | | Optional/Standard | Standard for C1225iF Not available for C1225 |
| Supported media weights | | Modem speed | Super G3 33.6 kbps (Up to 3 seconds per page ¹) |
| | | Fax resolution | Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi |
| Page Description Language(s) | UFR II , PCL5c/6, Adobe PostScript Level 3(Standard for C1225iF) PCL5c/6, Adobe PostScript Level 3 not available for C1225 | Fax memory | Up to 512 pages ¹ |
| Fonts | PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts PS fonts: 136 Roman fonts PS/PCL not available for C1225 | Speed dials | Max. 281 |
| Operating System compatibility | UFR II: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PCL: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2 PS: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8/Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows XP / Windows Vista / Windows 7 / Windows 8/ Windows 8.1 Please refer to http://software.canon-europe.com/ for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. | Group dials / destinations | Max. 199 dials |
| Copy Specifications | | Sequential broadcast | Max. 310 addresses |
| Copy speed (BW/Colour) | Please refer to the quoted print speeds | Memory backup | Yes |
| First Copy Output Time (FCOT) (BW/Colour) | 8.4 sec / 10.5 sec | Other features | Fax Forwarding, Dual Access, PC Fax (TX only) |
| Copy resolution | Reading: 600 dpi x 600 dpi Printing: 600 dpi x 600 dpi | General Specifications | |
| Multiple copy | Up to 999 copies | Warm-up time | Approx. 34 seconds from power ON |
| Reduction/Enlargement | Zoom: 25 - 400 % in 1 % increments Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200v%, 400% | Recovery from sleep mode | 10 seconds or less |
| Scan Specifications | | Interface type | USB 2.0 Hi-Speed,1000BaseT / 100Base-TX / 10Base-T, 1 x USB Host (Front), 1 x USB Host (Rear), 1 x USB device Recommended third party wireless solution is Silnex SX-BR-4600 WAN. For more details please refer to www.silnex-europe.com TCP/IP* (LPD / Port 9100 / WSD / IPP / IPPS / SMB / FTP), IPX/SPX (NDS, Bindery) *IPv4/IPv6 support 1.0 GB QVGA Color LCD 8.9 cm (3.5 inch) touch / swipe supported display Standard: 511 mm x 549 mm x 610 mm Optional: With Cassette Feeding Unit-AJ1: 511 mm x 549 mm x 1035 mm 852 mm x 843 mm (Main unit + Multi-purpose tray open + Cassette drawers open) Approx. 44 kg including toner Temperature: 10 to 30°C (50 to 86°F) Humidity: 20 to 80 % RH (no condensation) 220 - 240 V (±10 %), 50/60 Hz (±2 Hz), 3.7 Amp Maximum: Approx. 1.5 kW Standby: Approx. 30 W Sleep mode: Approx. 1.0 W or less ² Time to put the device to sleep mode : 60 sec Typical Electricity Consumption (TEC) rating ³ : 0.8 kWh Only for C1225 (non Fax model) Plugin-off: 0.5W or less (Normal mode) Time to put the device to plugin-off: 4 hours |
| Supported media size/s | A4, A5, B5, Custom sizes: 140 mm to 216 mm x 128 mm to 356 mm (when fed through the DADF) | Network protocols | |
| Supported media weight/s | Single-sided scanning: 50 to 105 gsm (DADF) Double-sided scanning: 64 to 105 gsm (DADF) | Memory | |
| | | Control panel | |
| | | Dimensions (W x D x H) | |
| | | Installation space (W x D) | |
| | | Weight | |
| | | Operating environment | |
| | | Power source | |
| | | Power consumption | |

Technical Specifications

Noise levels Sound Pressure ⁴ (reference data, LpAm, Bystander's position) Software and printer management

Security features

Consumables

Toner bottle

Sound Pressure Noise Levels:
Active: 50 dB
Standby: Inaudible (Less than 30dB)

eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.

Remote Firmware System (GDLS):

Allows the remote distribution of firmware.

Remote User Interface (RUI): Web-based interface to each device that helps to provide remote device management and control.

Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers

Standard:
IP/Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X, Secured Print, Department ID
Optional: Send PDF Security Feature Set-E1@E

Toner 34 Black / Cyan / Magenta / Yellow Toner
(Yield: BK 12,000 / CMY 7,300 pages) ⁵

Specifications for options

Cassette feeding unit

Hardware accessories ¹

Print controller accessories

Document security accessories

Other options

Name: Cassette Feeding Unit-AJ1

Description: Optional cassette feeding unit with 1 x 550 sheets paper capacity. Takes the cassette paper capacity up to 1,200 sheets.

Dimensions (W x D x H): 511 mm x 508 mm x 425 mm

Weight: Approx. 15 kg

HANDSET-J1 EUR/HANDSET-J1 SA

BARCODE PRINTING KIT-D1@E: Enables barcode printing via jet caps technology.

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

Drum Unit 034 (BK / C / M / Y)

Waste Toner Box WT-A3:

Footnotes

¹ Based on ITU-T Standard Chart No. 1

² 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information

³ Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).

⁴ Declared noise emission in accordance with ISO 7779

⁵ Based on 5% coverage (A4)

All specifications subject to change without notice



C1225iF only



C1225iF only



C1225iF only



SAP® Printer Vendor Solution

C1225iF only



C1225iF only

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2014

Canon (UK) Ltd
Woodhatch
Reigate
Surrey RH2 8BF
Telephone no 01737 220000
Facsimile 01737 220022
canon.co.uk

Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co.Dublin, Ireland
Telephone No: 01 2052400
Facsimile No: 01 2052525
canon.ie

Canon